


A? 97H @9EHD, 7@67>; <= 7F3B7



SOLVENT FREE


**EVERGREEN®
GODPAGT**

HOGES TERKE KLEEFKRACHT

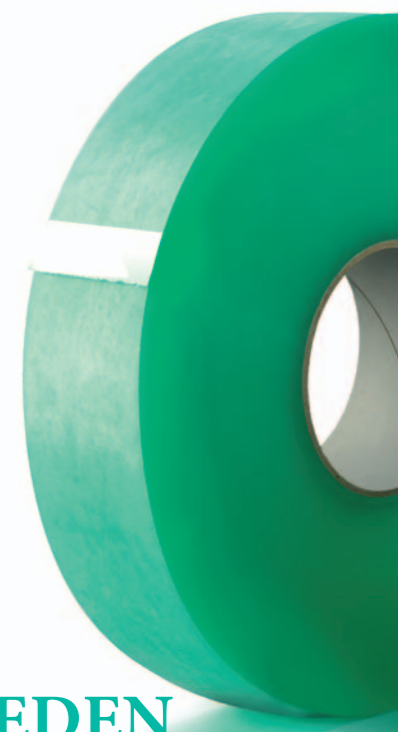

Evergreen [e WW ` [Vgi WYWWsf[WfSbW _ W WW ZaYW] Wk dSUZf YWUZ]] f haad hWWaWSeel` YWz7hWdW [e WaZrdWWW] I ZWk WW ea'hWZrd\W\ _ W [e #". dMkUWSSz6WV[dMfWESU [e VS]I\ WW ` [Vgi WXd_g`WWY ZaaY W VSSch_ g[fW SfWYWUZ]] f haad _ SUZ[S'W hWd W] [Yz 6W] W_ Wj W hS` 7hWdW]a_ W ahWZWW _ W VWYaWWWXWdZSbbW hS` WW BB Ea'hWf la [e 7hWdW YWUZ]] f haad dMkUW]Sfa` W haad faWSeel` YW a` WdWW YdSWz6 WsbWaabf [UZf Sx6 WdWVW] Vgd[eS`WW fW[W ab Wd^W` [Wab WW Vaaez`

VOOR EXTREME OMSTANDIGHEDEN

	ACRYL	VERPAKKINGSTAPE
---	--------------	------------------------

Technical Data*		Kenmerken
Total Thickness	50 µm	• BOPP
Backing Thickness	28 µm	• Acryl op waterbasis (solvent-free)
Adhesion to steel	3,0 N/cm	• Noise
Tensile Strength	40 N/cm	• Hoge kleefkracht
Elongation at break	160%	• Groen op de rol, transparant op de doos

Aanbevolen opslagtemperatuur 15-20 graden.



TPC

Trias Packaging Company B.V.
Van Schijndelstraat 9
5145 RE Waalwijk

Tel.: (+31) 416 54 31 10
Fax: (+31) 416 31 93 36
www.tpc-nederland.nl
info@tpc-nederland.nl

* The mentioned data stem from an average analysis carried out on our standard production and may undergo unexpected changes. Therefore they are not binding for our company.